

LITE FLASH

FLASH CONVEYOR WITH SOLVENT DETECTOR



FLASH CONVEYOR DRYING OF SOLVENT-BASED PRODUCTS

Extraction of explosive gases by fans based on the security requirements according to EN 1539.

Option: Sensor to measure the amount of solvents in the environment and stop operation.

UNIQUE CONCEPT

CONFIGURATION

- High component clearance <150 mm top and bottom.
- PCBA-pallets dimensions: up to (710x540) mm. Max. pallet weight: 20 kg.
- Solvent density sensor.
- Auto lifting lateral door / Conveyor shutters.
- Dimensions: 1500x1180x1480 mm.
- No air supply required.

PRODUCTIVITY

- Supervised conveyor speed: 300-2.000 mm/min.


TRACEABILITY (SMARTBOX OPTION)

- Process tracker / Industry 4.0.
- Live process parameters log.
- Embedded trend analysis.

OPTIMIZATION

- Floor space & Energy efficient.
- Eco-friendly.

GLOBAL NETWORK

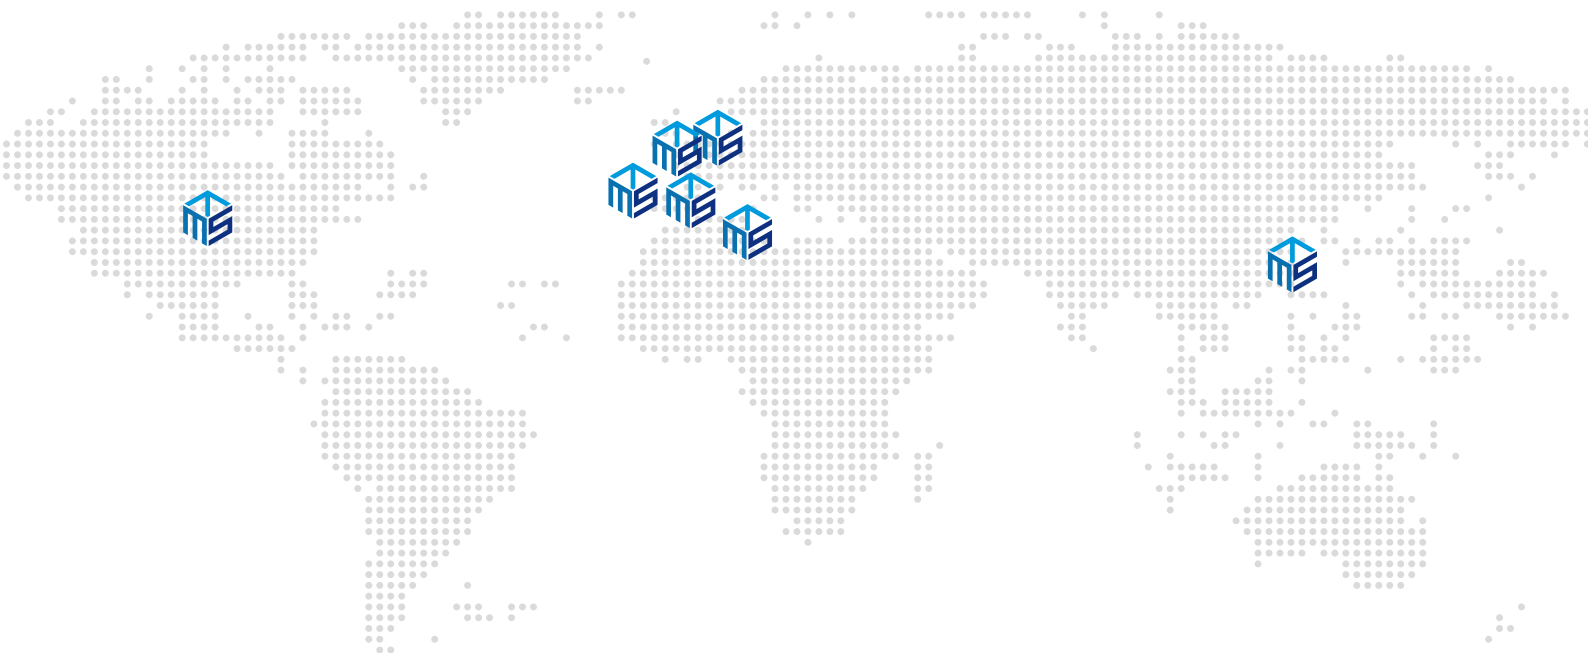

 PART OF INCORPORATECHNO

WWW.MSTECHCORP.EU

FACTORYCENTER
SEOUL - BARCELONA

BUSINESSCENTER
KOREA - MEXICO - GERMANY
FRANCE - SPAIN - PORTUGAL - TUNISIA

TESTCENTER
KOREA - SPAIN - FRANCE

FACTORYCENTER
BARCELONA

Ctra. C-31, 148,4. Masia Les Planes, 20.
Camí de Les Planes. 08880 Cubelles,
Barcelona. Spain

administrative@mstechcorp.eu

BUSINESSCENTER

sales@mstechcorp.eu

services@mstechcorp.eu



MSTECH Europe is part of Incorpora Techno Group